



无锡隆成科技有限公司

WUXI RCHUN TECHNOLOGY CO., LTD.

地址：江苏省无锡市梁溪区山北会北路 26-12，邮编 214037 电话：0510-88297505，传真：0510-85259196
Address: No.26-12, HuiBei Road Liangxi District Wuxi China, 214037 Tel: 0510-88297505 Fax: 0510-85259196


EF-515 Inhibitor

General

EF-515 polymerization inhibitor is used to increase the shelf life of olefinic resins. It is a yellow to brown solution of an inhibitor in a monomer, and tends to darken with age. Because it is typically used at low concentrations in formulated systems, this discoloration does not affect performance and should not affect the final product quality. EF-515 polymerization inhibitor may be used in coatings, adhesives, photoresist, printing inks and printing plates as well as unsaturated polyester resins, vinyl monomers and acrylated oligomers. It typically is used in concentrations ranging from 0.1% to 1% by weight.


Properties

Inhibitor



Chemical name : N-Nitrosophenylhydroxylamine Aluminum Salt 8%
CAS No. : 15305-07-4
Molecular formula : C₁₈H₁₅AlN₆O₆

Monomer

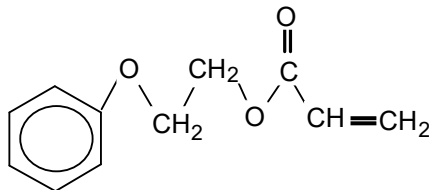

Chemical name : 2-Phenoxy Ethoxy Acrylate 92%
CAS No. : 48145-04-6
Molecular formula : C₁₁H₁₂O₃

Physical data

Appearance : Yellow to brown liquid
Inhibitor molecular weight : 438.33
Monomer molecular weight : 192.21

Specifications

Active amount of inhibitor : ≥8.0%
Water : ≤0.5%

Packaging and Storage

25kg fiber drum, Avoid knock, fire, insolation and rain. Kept in dry and ventilating place, far away from heat and fire.